


KERN DE 150K2DL

Langjähriges Erfolgsmodell mit staub- und spritzwassergeschütztem Auswertegerät

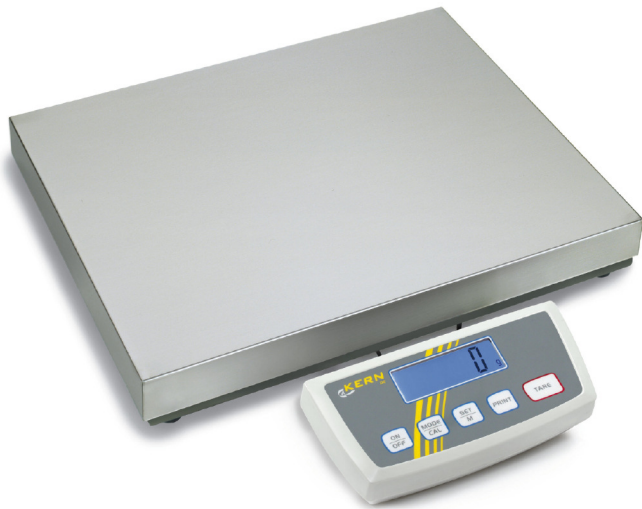

Measuring system	
Adjustment options:	External calibration
Linearity:	8 g 20 g
Readout [d]:	2 g 5 g
Recommended adjusting weight:	150 kg (F2)
Reproducibility:	2 g 5 g
Resolution:	30 30.000
Stabilisation time:	2,500 s
Warm up time:	2 h 2 h
Weighing range [Max]:	60 kg 150 kg
Weighing system:	Strain gauge
Weighing units:	dwt g kg lb mo oz ozt tl (HK) tl (Tw) tol

Display	
Display digit height:	2,500 cm

Counting	
Counting resolution:	37500
Minimum piece weight at piece counting:	4 g

Functions	
Counting function:	yes
Percentage determination:	yes
Vibration-free weighing (Animal weighing program):	yes

Environmental conditions	
Maximum humidity:	80 %
Maximum operating temperature:	35 °C
Minimum ambient temperature:	5 °C

Power supply	
Charging time:	10 h
Input voltage:	220 V - 240 V AC 50 Hz
Operating time:	12 h
Operating time (Backlight off):	30 h
Operating time (Backlight on):	15 h
Rechargeable battery:	Rchrg. battery optional

Service	
DAkkS Certificate:	963-129

Category	
Category:	Balances
Product Group:	Platform scale

Packaging & shipping	
Delivery:	24 h
Dimensions packaging (WxDxH):	620 x 610 x 215 mm
Gross weight:	16,880 kg
Net weight:	14,770 kg
Shipping method:	Parcel service

Construction	
Cable length of display device:	1,400 m
Dimensions of display device (WÄDÄH):	225 x 110 x 55 mm
Dimensions of weighing plate (WxDxH):	520 x 405 x 95 mm
Material weighing plate:	stainless steel
Weighing surface (WxD):	520 x 405 mm