


KERN ILT10K-3LGAM



Hochmoderne Premium Touchscreen-Plattformwaagen mit dem kompletten Funktionsumfang für anspruchsvolle Prozesse

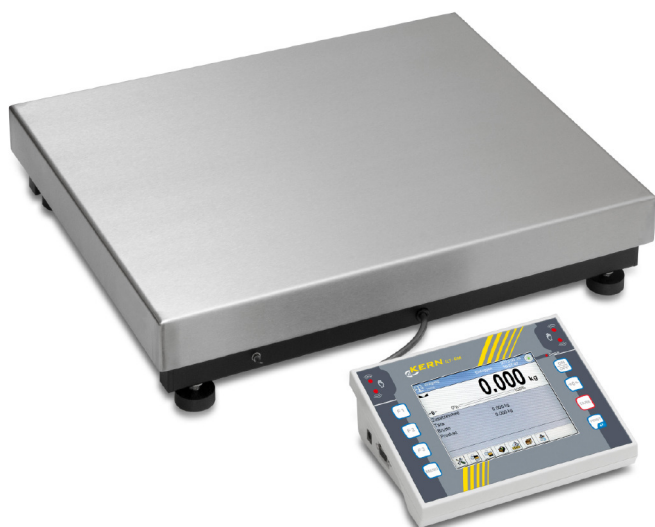

Functions

Capacity display:	yes
Conversion function:	yes
Counting function:	yes
Dispensing function:	yes
Function to save totals:	yes
Help function on the display:	yes
Percentage determination:	yes
PRE-TARE function:	yes
Standby function:	yes
Statistical function:	yes
Time display:	yes
Vibration-free weighing (Animal weighing program):	yes
Weighing with tolerance range:	yes

Measuring system

Adjustment options:	External calibration
Linearity:	4 g 10 g
Readout [d]:	2 g 5 g
Recommended adjusting weight:	10000 g (M1)
Reproducibility:	2 g 5 g
Resolution:	3 3.000
Stabilisation time:	2 s
Tare range:	15 kg
Warm up time:	10 min 10 min
Weighing range [Max]:	6 kg 15 kg
Weighing system:	Strain gauge
Weighing units:	ct g kg

Display

Display digit height:	2,100 cm
Display digit height:	1,900 cm

Technical data about verification

Minimum load [Min]:	40 g 100 g
Periodic Verification Italy:	969-112
Verification approval conforming to 90/384/EEC:	yes
Verification by KERN possible:	yes
Verification class:	III
Verification value [e]:	2 g 5 g

Counting

Reference weight:	yes
-------------------	-----

Environmental conditions

Maximum humidity:	80 %
Maximum operating temperature:	35 °C
Minimum ambient temperature:	15 °C

Power supply

Input voltage:	110 V - 230 V AC
----------------	------------------

Service

DAkkS Certificate:	963-128
Verification:	965-228

Category

Category:	Balances
Product Group:	Industrial scale

Packaging & shipping

Delivery:	72 h
Dimensions packaging (WxDxH):	695 x 405 x 220 mm
Gross weight:	6 kg
Net weight:	14,950 kg
Shipping method:	Parcel service

Construction

Casing material:	Plastic
Dimensions of display device (WÄDÄH):	215 x 156 x 71 mm
Dimensions of weighing plate (WxDxH):	400 x 300 x 128 mm
Level indicator:	yes
Material weighing plate:	stainless steel
Revolving screw feet:	yes
Weighing surface (WxD):	400 x 300 mm