


KERN KFD600V20M

Wägebrücke mit IP67-Schutz mit zwei integrierten Auffahrrampen

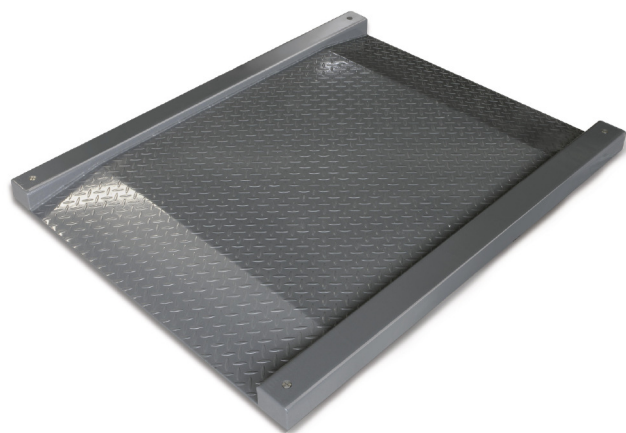

Measuring system

Adjustment options:	External calibration
Linearity:	400 g
Readout [d]:	200 g
Recommended adjusting weight:	600 kg (M2)
Reproducibility:	200 g
Resolution (non verifiable):	3000
Stabilisation time:	2 s
Tare range:	-600000000 mg
Weighing range [Max]:	600 kg
Weighing system:	Strain gauge

Display

Display digit height:	5,200 cm
-----------------------	----------

Technical data about verification

Minimum load [Min]:	4 kg
Verification approval conforming to 90/384/EEC:	yes
Verification class:	III
Verification value [e]:	200 g

Functions

Function to save totals:	yes
Vibration-free weighing (Animal weighing program):	yes
Weighing with tolerance range:	yes

Environmental conditions

Maximum humidity:	80 %
Maximum operating temperature:	40 °C
Minimum ambient temperature:	-10 °C
Minimum humidity:	0 %

Power supply

Charging time:	10 h
Input voltage:	110 V - 230 V AC
Operating time (Backlight off):	35 h
Operating time (Backlight on):	8 h
Rechargeable battery:	Rchrg. battery optional (factory)

Service

DAkkS Certificate:	963-130
--------------------	---------

Category

Category:	Platforms
Product Group:	Weighing bridge

Packaging & shipping

Delivery:	48 h
Dimensions packaging (WxDxH):	1650 x 1250 x 350 mm
Gross weight:	106 kg
Net weight:	130 kg
Shipping method:	Freight forwarder

Construction

Cable length of display device:	5 m
Dimensions of weighing plate (WxDxH):	1600 x 1200 x 78 mm
Material weighing plate:	Metal lacquered
Revolving screw feet:	yes
Wall mount:	yes
Weighing surface (WxD):	1000 x 1000 mm