

## ACCESSORIES

PROFESSIONAL  
MEASURING



# 2018

# KERN Pictograms

 <b>Internal adjusting:</b> Quick setting up of the balance's accuracy with internal adjusting weight (motordriven)	 <b>GLP/ISO log:</b> The balance displays serial number, user ID, weight, date and time, regardless of a printer connection	 <b>Suspended weighing:</b> Load support with hook on the underside of the balance
 <b>Adjusting program CAL:</b> For quick setting up of the balance's accuracy. External adjusting weight required	 <b>GLP/ISO log:</b> With weight, date and time. Only with KERN printers, see page 154/155	 <b>Battery operation:</b> Ready for battery operation. The battery type is specified for each device
 <b>Memory:</b> Balance memory capacity, e.g. for article data, weighing data, tare weights, PLU etc.	 <b>Piece counting:</b> Reference quantities selectable. Display can be switched from piece to weight	 <b>Rechargeable battery pack:</b> Rechargeable set
 <b>Alibi memory:</b> Secure, electronic archiving of weighing results, complying with the 2014/31/EU standard. For details see page 191	 <b>Recipe level A:</b> The weights of the recipe ingredients can be added together and the total weight of the recipe can be printed out	 <b>Universal mains adapter:</b> with universal input and optional input socket adapters for A) EU, GB B) EU, GB, CH, USA C) EU, GB, CH, USA, AUS
 <b>Data interface RS-232:</b> To connect the balance to a printer, PC or network	 <b>Recipe level B:</b> Internal memory for complete recipes with name and target value of the recipe ingredients. User guidance through display	 <b>Mains adapter:</b> 230V/50Hz in standard version for EU. On request GB, USA or AUS version available
 <b>RS-485 data interface:</b> To connect the balance to a printer, PC or other peripherals. Suitable for data transfer over large distances. Network in bus topology is possible	 <b>Recipe level C:</b> Internal memory for complete recipes with name and target value of the recipe ingredients. User guidance through display, multiplier function, adjustment of recipe when dosages are exceeded or barcode recognition	 <b>Power supply:</b> Integrated in balance. 230V/50Hz standard EU. More standards e.g. GB, USA or AUS on request
 <b>USB data interface:</b> To connect the balance to a printer, PC or other peripherals	 <b>Totalising level A:</b> The weights of similar items can be added together and the total can be printed out	 <b>Weighing principle: Strain gauges</b> Electrical resistor on an elastic deforming body
 <b>Bluetooth* data interface:</b> To transfer data from the balance to a printer, PC or other peripherals	 <b>Percentage determination:</b> Determining the deviation in % from the target value (100 %)	 <b>Weighing principle: Tuning fork</b> A resonating body is electromagnetically excited, causing it to oscillate
 <b>WLAN data interface:</b> To transfer data from the balance to a printer, PC or other peripherals	 <b>Weighing units:</b> Can be switched to e.g. nonmetric units at the touch of a key. See balance model. Please refer to KERN's website for more details	 <b>Weighing principle: Electromagnetic force compensation</b> Coil inside a permanent magnet. For the most accurate weighings
 <b>Control outputs (optocoupler, digital I/O):</b> To connect relays, signal lamps, valves, etc.	 <b>Weighing with tolerance range:</b> (Checkweighing) Upper and lower limiting can be programmed individually, e.g. for sorting and dosing. The process is supported by an audible or visual signal, see the relevant model	 <b>Weighing principle: Single cell technology</b> Advanced version of the force compensation principle with the highest level of precision
 <b>Interface for second balance:</b> For direct connection of a second balance	 <b>Hold function:</b> (Animal weighing program) When the weighing conditions are unstable, a stable weight is calculated as an average value	 <b>Verification possible:</b> The time required for verification is specified in the pictogram
 <b>Network interface:</b> For connecting the scale to an Ethernet network	 <b>Protection against dust and water splashes IPxx:</b> The type of protection is shown in the pictogram. For details see page 58	 <b>DAkkS calibration possible (DKD):</b> The time required for DAkkS calibration is shown in days in the pictogram
 <b>Wireless data transfer:</b> between the weighing unit and the evaluation unit using an integrated radio module	 <b>Stainless steel:</b> The balance is protected against corrosion	 <b>Package shipment:</b> The time required for internal shipping preparations is shown in days in the pictogram
 <b>KERN Communication Protocol (KCP):</b> It is a standardized interface command set for KERN balances and other instruments, which allows retrieving and controlling all relevant parameters and functions of the device. KERN devices featuring KCP are thus easily integrated with computers, industrial controllers and other digital systems	 <b>Pallet shipment:</b> The time required for internal shipping preparations is shown in days in the pictogram	

# KERN – measuring technology and testing services from a single source




## Balances & Test service catalogue

Provides a complete overview of the KERN line of balances, test weights, and services such as verification, calibration, etc.



## Medical scales catalogue

Complete line of medical scales, from infant scales to patient scales, chair scales and adiposity scales, as well as hand grip dynamometers, chemist's balances and veterinary scales.

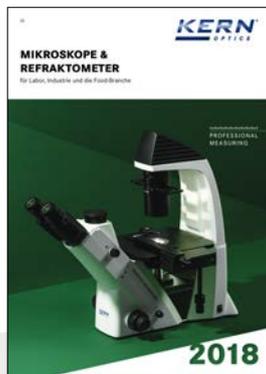

## Microscopes & refractometers catalogue

Extensive range in the area of optical instruments, such as, for example, biological microscopes, stereo microscopes, metallurgical microscopes, polarisation microscopes as well as analogue and digital refractometers.



## SAUTER measuring equipment catalogue

Test instruments for industry and commerce, such as force, coating thickness, material thickness and calibration service.



## DAkKS calibration service brochure

Detailed information on topics pertaining to the calibration and verification of balances, test weights, and force measuring devices.

## Your advantages

### fast

- 24 hours delivery service for products in stock – ordered today, on its way tomorrow
- Sales & service hotline available from 8:00 am to 6:00 pm

### reliable

- Up to 3 years warranty
- Precision in weighing technology for more than 170 years

### competent

- DAkKS accreditation DIN EN ISO/IEC 17025
- Certified QM system DIN EN ISO 9001
- Authorisation for initial verification by the manufacturer 2014/31/EU
- Medical certifications DIN EN ISO 13485 and 93/42/EEC

### versatile

- One-stop shopping: from pocket balances through to 15 t crane balance – everything from one supplier
- Find the product you want at lightning speed with the “Balance Quick-Finder” at [www.kern-sohn.com](http://www.kern-sohn.com)



### Order hotline

+49 [0] 7433 9933-0



### Service hotline

+49 [0] 7433 9933-199



### Calibration hotline

+49 [0] 7433 9933-196



### Our team of consultants will assist you

from Monday to Friday  
from 8:00 am to 6:00 pm



### Online Shop

[www.kern-sohn.com](http://www.kern-sohn.com)



### E-mail order

[info@kern-sohn.com](mailto:info@kern-sohn.com)



### Fax order

+49 [0] 7433 9933-146



### [www.kern-sohn.com](http://www.kern-sohn.com)


Information on current product availability, product data sheets, user instructions, useful knowledge, technical glossary, images and much for you to download, practical topic areas, which will guide you to the right product in your industry as well as a clever test weight and balance search engine.

## Accessories

### Printers



### Second display

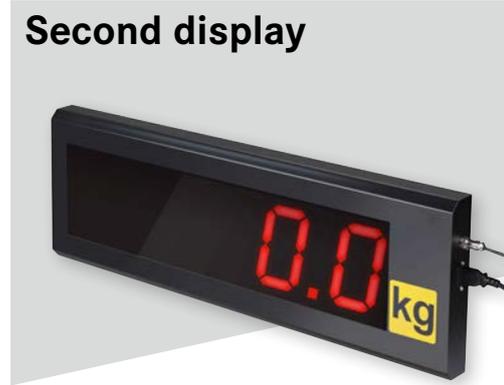

### Transport case



### Ioniser



### Stands




### Interface adapter



**Important note for printer orders:** Please state your balance model when ordering, so that the printer can be preconfigured in the factory to suit your balance.

STANDARD



### KERN 911-013

#### Matrix needle printer

For printing weighing results on normal paper, which is ideal for long-term archiving.

- Interface cable not included with delivery
- Not suitable for KERN DBS, PNS/PNJ, PES/PEJ ranges

#### Technical data


- Needle print
- Speed: 1,8 line/sec
- Max. 40 characters per line
- Paper stripes: 57 mm wide
- Operation via mains adapter 230V/50Hz (standard EU), as standard
- Dimensions housing: W×D×H 100×180×106 mm

Price printer without interface cable, KERN 911-013, **€ 360,-**

#### Accessories

- Paper rolls (10 pcs.), KERN 911-013-010, **€ 35,-**
- Universal mains adapter, standard EU/GB/US, KERN ABS-A01, **€ 80,-**

STANDARD



### KERN YKN-01

#### Matrix needle printer

For printing weighing results on normal paper, which is ideal for long-term archiving.

- Dimensions housing: W×D×H 158×106×40 mm
- Interface cable not included with delivery

#### Technical data


- Needle print
- Speed: 1 line/sec
- Max. 16 characters per line
- Paper stripes: 44 mm wide
- Operation via mains adapter 230V/50Hz, as standard

Price printer without interface cable, KERN YKN-01, **€ 230,-**

#### Accessories

- Paper rolls (5 pcs.), KERN YKN-A01, **€ 35,-**

STANDARD

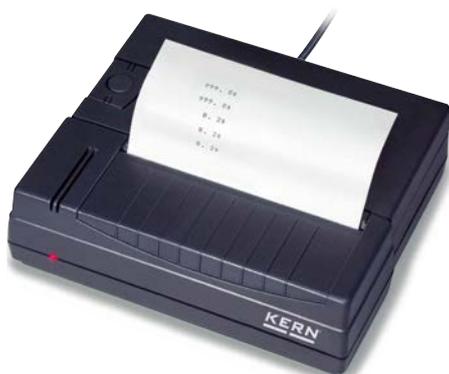

### KERN YKB-01N

#### Thermal printer

For printing weighing results, recipes, quantities etc. or for GLP record keeping of balance adjustment with date and time print. Language versions: DE, GB, FR.

- Dimensions housing: W×D×H 165×140×50 mm
- Interface cable not included with delivery

#### Technical data

- Thermal print
- Speed: 0,75 lines/sec
- Max. 40 characters per line
- Paper stripes: 112 mm wide
- Operation via mains adapter 230V/50Hz, Standard EURO/UK/US, as standard

Price printer without interface cable, KERN YKB-01N, **€ 290,-**

#### Accessories

- Paper rolls (10 pcs.), KERN YKB-A10, **€ 55,-**

#### Individual header data:

For printers **KERN 911-013, YKN-01, YKB-01N, YKE-01 and YKC-01 (in combination with YKI-02)** the free software **KERN SHM-01** (see [www.kern-sohn.com](http://www.kern-sohn.com)) can be used to print 4 header lines on the printout (see marking on balance). Compatible models: KERN 440, DE, FCB, FKB-A, PCB, PCD.

# Printers

STANDARD



## KERN YKS-01

### Thermal statistics printer

For printing weighing results, recipes etc. or for GLP record keeping of weighing data with date and time print (not in combination with KERN counting scales or KERN moisture analysers).

Numerator; with statistical functions such as count and total of all measurements, minimum and maximum values of the main unit, range (Max-Min), average value, standard deviation, available units: mg, g, kg, pcs. Language versions: DE, GB, FR.

- Max. 40 characters per line
- Paper stripes: 112 mm wide
- Operation via mains adapter 230V/50Hz, Standard EURO/UK/US, as standard
- Dimensions housing: W×D×H 165×140×50 mm
- Interface cable not included with delivery
- Not suitable for KERN PFB ranges

Price printer without interface cable, KERN YKS-01, **€ 390,-**

### Technical data

- Thermal print
- Speed: 0,75 lines/sec

### Accessories

Paper rolls (10 pcs.), KERN YKB-A10, **€ 55,-**

STANDARD



## KERN YKE-01

### Thermal label printer

Affordable universal label printer to print out weighing results on thermal labels, compatible with all KERN 2018 balances. ASCII-capable.

- Interface cable not included with delivery
- Not suitable for KERN CPB, RPB, CFS, CKE, IFS, CDS, CCS, BFS, KFS-TM ranges

Price printer without interface cable, KERN YKE-01, **€ 590,-**

### Technical data

- Thermal print
- Speed: 22 mm/s
- Max. 82 characters per line
- Paper stripes: 112 mm wide
- Operation via mains adapter 230V/50Hz, Standard EURO/UK/US, as standard
- Dimensions housing: W×D×H 150×155×65 mm

### Accessories

- Paper roll (1 pc.), Dimensions labels: W×D 73×61 mm, 100 labels: KERN YKE-A02, **€ 30,-** 105×48 mm, 45 labels: KERN YKE-A03, **€ 30,-**

## Interface cable for RS-232

For direct connection to a printer or PC, cable length approx. 1.5 m. The interface parameters can be set using the balance keypad.

The interface cable is **free of charge** if you purchase balance, printer or Ethernet-/WLAN-/Bluetooth adapter together. **Note**

Printer, ...	PC, YKI-01/-02/-03	911-013, YKE-01, YKB-01N, YKN-01	YKS-01	Price cable excl. of VAT ex works €
<b>Balance</b>	<b>KERN</b>	<b>KERN</b>	<b>KERN</b>	
440, 572, 573, ALJ-AM, ALS-A, ALT-B, CDS, CKE, DE-D, DS, EMB-V, FCB, FKA, FKB, FKC, FKB-A, FKT, FKTF, IKT, KB, PCB, PCD, PKS, PKT, PLJ-A, PLJ-F, PLS-A, PLS-F, PLE, PLT, KDP		<b>572-926</b>		<b>46,-</b>
EOC, IOC, BID		<b>EOC-A12</b>		
BFA, BFB, BFN, GAB-N, GAB-P, GAT, IFB, KFB-TAM, KFN-TAM, NBB, NFB, NFN, PFB, SFB, UFA, UFB, UFC, UFN		<b>CFS-A01</b>		
ABT-NM, PBJ, PBS		<b>770-926</b>		
HFT		<b>KFF-A01</b>		
EG-N, EW-N		<b>474-926</b>		
ADB, AEJ-CM, AEJ-NM, AES-C, AES-N, AET, CCP, CCT (for connecting the peripheral device to the PLJ-C reference balance), ILJ-C, ILS-C, ILT, PET, PLJ-C, PLJ-G, PNJ, PNS, PEJ, PES (printer/PC connection bidirectional)		<b>MLB-A05</b>		
DAB, KFS-T, KFS-T, MLS-D		<b>MLB-A05</b>	-	
DLB, DLT; DBS (not suitable in combination with KERN 911-013)		<b>572-926</b>	-	
BFS, CCS, CFS, CPB, EWJ, KFG-TM, KFS-TM, KFT-TM, IFG, IFS (from year of production 2015), IFT, PFB, PFB-M, RPB		<b>CFS-A01</b>	-	
YKU-01	<b>CFS-A01</b>	-	-	
PEJ, PES (printer connection unidirectional)	-	<b>474-926</b>		
ABJ-NM, ABS-N		<b>ACS-A01</b>		<b>75,-</b>
BAN, BKN, BXS, IXS, KXS-TM, SXS		<b>KXS-A04 (Factory Option)</b>		<b>100,-</b>
CCT (for connecting the peripheral device to the bulk scale ILT)		<b>KET-A09</b>		<b>120,-</b>

## KERN SCD-4.0

### BalanceConnection Software –

Flexible recording or transfer of measurements, particularly to Microsoft® Excel or Access

#### Features

- For operating systems Windows XP, Vista, 7, 8, 8.1, 10
- Supports balances measuring devices with RS 232, RS 485, Bluetooth, LAN or WLAN network (TCP/UDP/IP)
- Highly flexible formatting of the output (any order, formatting and rounding), particularly recording of date and time for every value transferred, if required
- Any number of devices/interfaces can be connected, as well as simultaneous and synchronised recording of several balances
- Key-activated or time-controlled interrogation of measurements or trigger of device functions, also for continuous recording
- The interface protocols for KERN balances are already predefined (standard configuration)


- Compatible interface cable included when you order a KERN balance at the same time
- Many different transfer and recording options:
  - Microsoft® Excel/Access/Word in the foreground or background
  - Other Windows applications (through key simulation), e.g. shipping software or ERP system (SAP, Sage, etc.)
  - File recording (e.g. as text or CSV file)
  - Print out on text or label printer
  - ODBC/SQL databases such as SQL Server or MySQL
  - Transfer to HTTP Webservices/Web forms
  - Screen output such as large display, line chart (drying curve for moisture analyzer), histogram, etc.

- Enables the connection of medical balances to practice EDP systems using the device data transfer protocol (GDT) and also the HL7 protocol


#### Benefits

- Typing errors during e.g. manual transfer are avoided
- Automatic recording, e.g. for long-term tests
- GLP-compliant lab software


KERN SCD-4.0, € 150,-

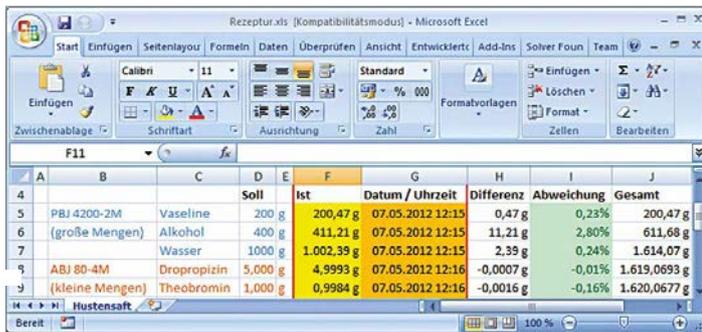

1 Easy transfer and editing of measuring results e.g. in Microsoft® Excel

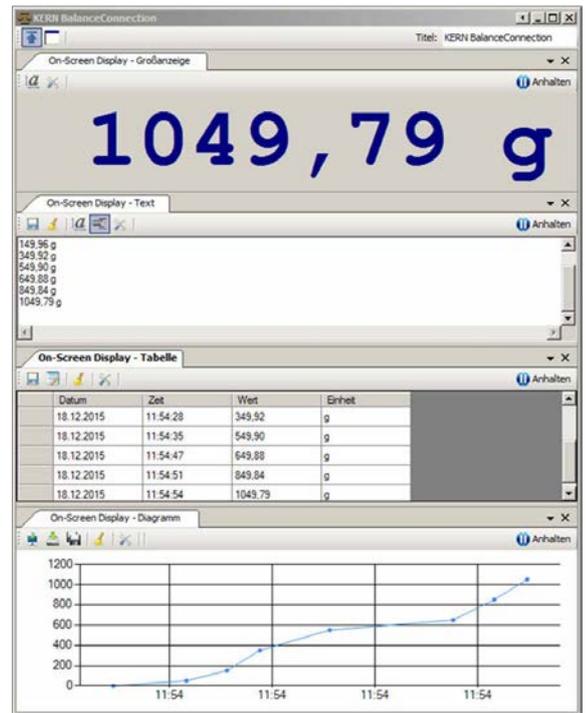


3 Different on-screen displays with export function

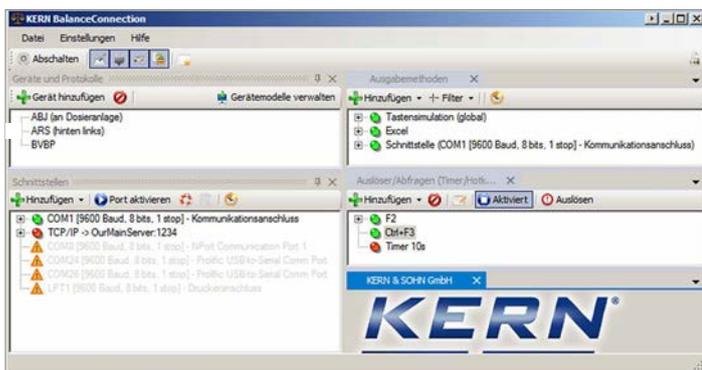


2 Full overview of devices, outputs, queries, interfaces, etc. shown on the output window immediately

**Note** Do you have questions about our software? The team from our Industry 4.0 centre of expertise will be happy to help. E-Mail: [ITsupport@kern-sohn.com](mailto:ITsupport@kern-sohn.com)

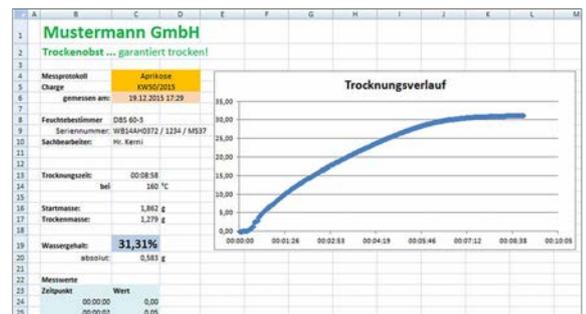


4 Measurement report with line chart showing a moisture analysis

**With products from KERN you are ready to face the challenges of Industry 4.0**

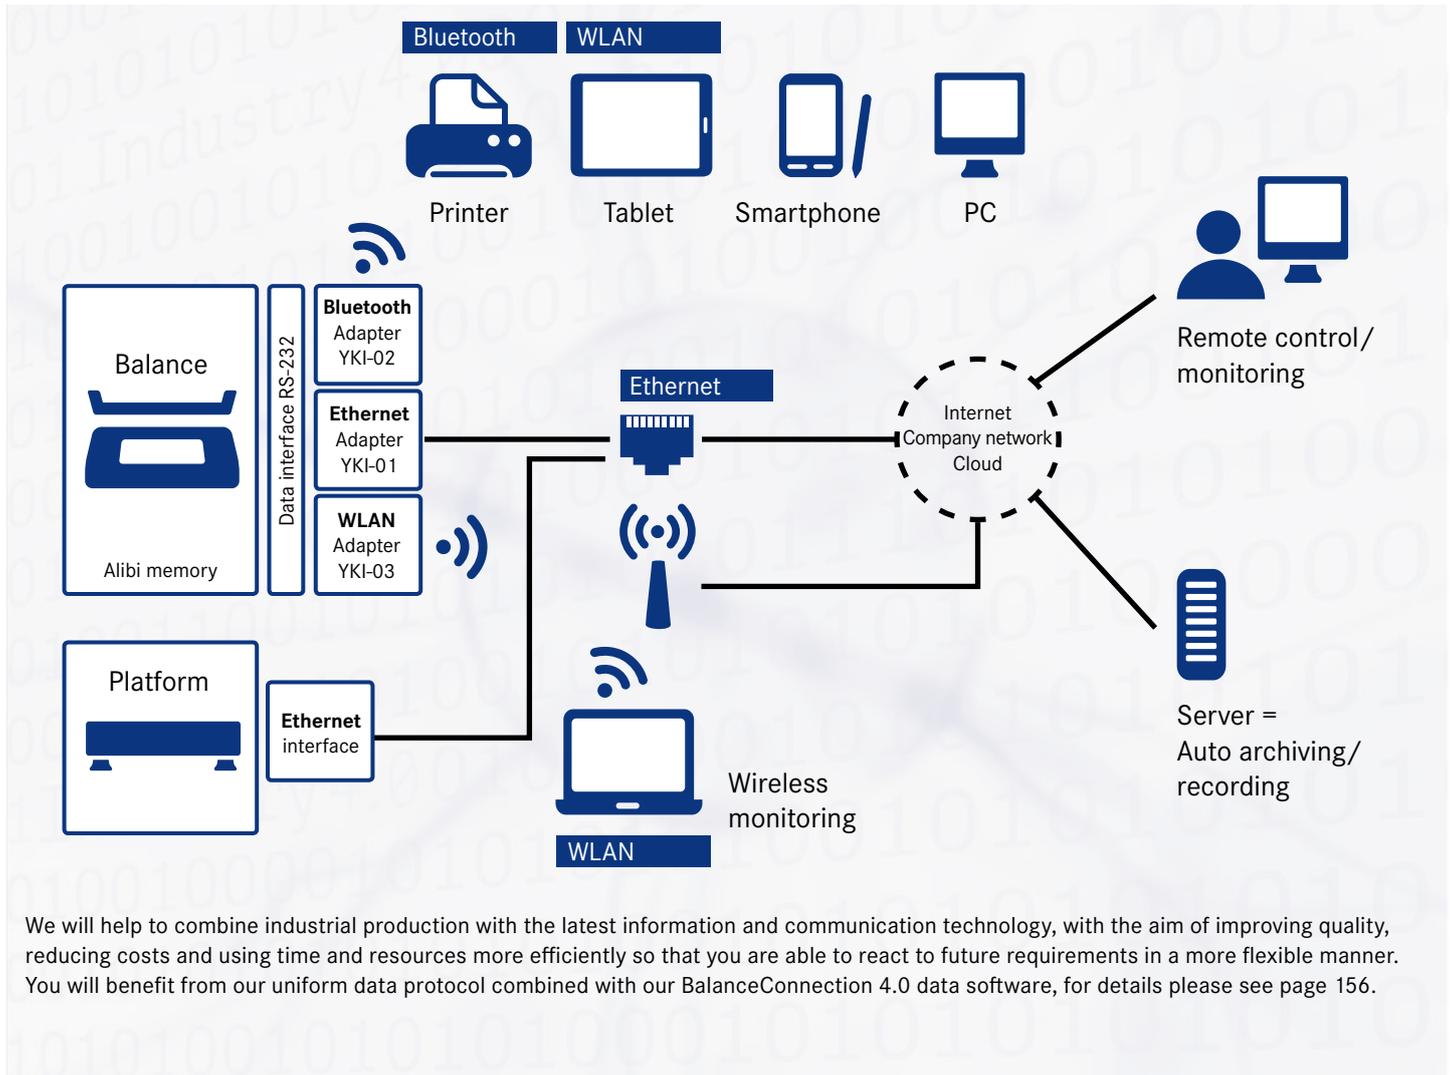

We will help to combine industrial production with the latest information and communication technology, with the aim of improving quality, reducing costs and using time and resources more efficiently so that you are able to react to future requirements in a more flexible manner. You will benefit from our uniform data protocol combined with our BalanceConnection 4.0 data software, for details please see page 156.



**Note:** To connect to your network, you will need information from your network administrator. We recommend discussing connecting your device into your network with the administrator before you place your order.

If you order a KERN balance at the same time, then the interface cable is **free of charge** (please specify balance model).

**KERN YKI-01**


**RS-232 / Ethernet adapter**

Adapter to connect balances, force measuring devices etc. with an RS-232 interface 2 to an IP-based Ethernet network 1. The adapter allows direct integration of measuring devices into most company networks, with automatic configuration using DHCP or statistical IP allocation. You can access the current measuring data at any time from within the whole network, without having to use additional cables. The adapter supports a wide range of configurational options using the enclosed administration software or by the web interface. The driver delivered with the goods allows you to access the measuring device with existing, non-network-compatible applications using a virtual COM port. Compatible with **KERN BalanceConnection software**. DIN track mount 3 or free-standing.

Scope of delivery: RS-232 Ethernet adapter with 1x Port RS-232 1, mains adapter 4, CD (driver, software, operating instructions), adhesive feet, (interface cable see page 155).

KERN YKI-01, € 290,-





▲ **Note:** To connect to your network, you will need information from your network administrator. We recommend discussing connecting your device into your network with the administrator before you place your order. If you order a KERN balance at the same time, then the interface cable is **free of charge** (please specify balance model). ▼

### KERN YKI-02

#### RS-232/Bluetooth-Adapter

adapter for the wireless connection of balances, force measuring devices etc. with an RS-232 interface to Bluetooth devices, such as Bluetooth printers (e.g. KERN YKC-01), tablets, laptops, Smartphones etc. In this way, where there is a physical separation or a large distance between the devices, the weighing data from one or several balances can be easily sent without cable and printed on a Bluetooth printer or transferred to a Bluetooth device (you would need the relevant software on the Bluetooth device, not included with the delivery). The compact adapter with its attractive design can usually be connected directly to the balance **1**, e.g. an additional interface cable would not be necessary.

Bluetooth adapter will be powered by the balance (if compatible) or with the mains adapter which is supplied as standard **2**. Range up to 100 m outside, depending on obstacles, such as, walls, the sensitivity and type of antenna of the receiver. Intersections of sending and receiving lines using the DCE/DTE switch **3**. Compatible with **KERN BalanceConnection software**.

Scope of delivery: RS-232/Bluetooth adapter, mains adapter (EU/UK/USA/AUS/CH) **2**, USB-A to Mini-USB-B cable **4**, gender changer **5**, driver CD, (interface cable see page 155).

KERN YKI-02, € 220,-



### KERN YKI-03

#### RS-232/WLAN-Adapter

High-quality adapter for the wireless connection of balances, force measuring devices etc. with RS-232 interface to WLAN-enabled devices, such as tablets, laptops, Smartphones etc. In this way, where there is a physical separation or a large distance between the devices, the weighing data from one or several balances can be easily transferred without cable to a WLAN device or a network (relevant software on the WLAN device needed, not included in delivery). The adapter allows direct integration of measurement devices into most company networks, with automatic configuration using DHCP or statistical IP allocation. You can access the current measuring data at any time from within the whole network, without having to use additional cables. The adapter supports a wide range of configurational options using the enclosed administration software or by the web interface. The driver delivered with the goods allows you to access the measurement device with existing, non-network-compatible applications using a virtual COM port.

Compatible with **KERN BalanceConnection Software**. The adapter also has an Ethernet interface for a wired connection to an IP-based Ethernet network **1**. Thanks to the screw terminals **2**, the power connection can be implemented individually using individual wires or using the robust, screw-in power connector **3**. Large input voltage range from 12 V–48 V. Suitable for wall mounting and DIN track mount **4** or free-standing.

Scope of delivery: RS-232/WLAN adapter, mains adapter, network cable (1 m), driver CD, (interface cable see page 155).

KERN YKI-03, € 750,-



**KERN YKD-A02**

**Large display**  
with superior display size, digit height 3" (76 mm). Luminescent, red LED display for easy reading of weight, even from a distance or under poor lighting conditions. 6 segments, mains connection as standard (230 V, EU/GB), connection using RS-232 data interface, dimensions WxDxH 541x55x180 mm.

Suitable for series IFB, BFB, NFB, UFA, UFB,  
KERN YKD-A02, € 220,-



**KERN CFS-A03**

**Signal lamp**  
Signal lamp for visual support of weighing with tolerance range. Three-colour LED, red, green, yellow. Power supply via balance using RS-232. Total dimensions WxDxH 100x180x300 mm

Suitable for series BFB, BFN, BID, CPB-N, GAB-N, GAB-P, IFB, IOC, KFB-TM, KFN-TM, KIB-TM, NBB, NFB, NFN, SFB, UFA, UFB, UFC, UFN,

KERN CFS-A03, € 250,-



**KERN CFS-A04**

**2nd RS-232 data interface**  
separate Y cable, e.g. for simultaneous connection of a printer, signal lamp etc. Suitable for series BAN, BFB, CFS, CPB-N, GAB-N, GAB-P, IFB, KFB-TM, NFB, NFN, UFN, UFA, UFB, SFB,

KERN CFS-A04, € 35,-



**KERN AFH 12**

**RS-232/USB adapter**  
to connect peripheral devices with USB connection, fits on all balances and measuring instruments with RS-232 port.

Scope of delivery:  
Converter cable, CD with driver,

KERN AFH 12, € 85,-



**KERN AFH 14**

**2 x RS-232/USB adapter**  
to connect peripheral devices with USB connection, fits on all balances and measuring instruments with RS-232 port.

Scope of delivery:  
Converter cable, CD with driver,

KERN AFH 14, € 115,-



**KERN YKA-02**

**Power supply adapter set**  
from standard EU to GB/US/AUS/CH etc. Four pieces. Ideal for devices with Class II protection (not earthed). Ideal for Euro moulded plug,

KERN YKA-02, € 31,-



**KERN YKP-01**

**Stand (tripodal)**  
stable and robust, to elevate display device, stainless steel, height-adjustable, large three-legged adjustable foot, height of stand approx. 750-1000 mm, Factory Option.

Suitable for series BFA, BBB, BFN, BBN, KEN-TM, NFN, SFB (from weighing plate size WxD 500x400 mm), UFN,

KERN YKP-01, € 370,-



**KERN YKP-02**

**Stand (tripodal)**  
stable and robust, to elevate display device, stainless steel, height-adjustable, large three-legged adjustable foot, height of stand approx. 750-1000 mm, Factory Option.

Suitable for series BFB, BXS, BFS, BFA, BBB, BBN, BKN, IFS, IFB, KFE-TM, KXG-TM, KXS-TM, KEN-TM, NFB, NBB, SFE, UFA, UFB, UFC,

KERN YKP-02, € 210,-



**KERN RFS-A02**

**Tare pan**

Made of stainless steel, which makes cleaning easy and hygienic. Ideal for weighing loose screws, small parts, fruit, vegetables, cheese, etc.

- W×D×H 370×240×20 mm
- Net weight approx. 524 g

KERN RFS-A02, € 55,-



**KERN CH-A01N**

**Tare pan with pan beam**

Made of stainless steel. Ideal for weighing loose small parts, fruit, vegetables etc. Max. load 30 kg. Removable tare pan which makes cleaning easy and hygienic. Suitable for models KERN CH 15K20, HCB 20K10, HCN 20K50IP, HDB-N.

- Dimensions: Tare pan  $\phi$ /H 273×40 mm
- Pan beam: W×D×H 320×273×300 mm
- Total dimensions: W×D×H 320×273×340 mm
- Total net weight approx. 1000 g

KERN CH-A01N, € 70,-



**KERN ABS-A08**

**Protective dust cover**

For protection from dust and light. Suitable for all KERN analytical balances and precision balances with glass draught shield.

KERN ABS-A08, € 30,-



**KERN YDB-03**

**Universal density set**

Universal density set for precise and convenient density determination of liquids and solids  $\leq/\geq 1$ . Suitable for all KERN analytical balances.

**Scope of delivery:** Beaker ( $\phi$ ×H 84×113 mm), thermometer, sample holder, adapter, equalising weights, volume plummet (stainless steel, 20 g), universal submersible basket for solid bodies which float and sink. The wire of the submersible basket has a diameter of 0.5 mm and therefore complies with the requirements

of DIN EN ISO 1183-1 (test methods for the determination of density of non-foamed plastics)

KERN YDB-03, € 390,-

Optional:

Density determination of the volume plummet, DAkKS calibration certificate with all data relating to the density and volume,

KERN 962-335V, € 143,-



**KERN YBI-01A**

**Ioniser to neutralise electrostatic charge**

Goods to be weighed which are non-conductive, such as plastic, china, glass, etc often carry electrostatic charge. The electromagnetic field which then occurs between the goods to be weighed and the balance can cause the weighing result to be distorted by up to a gramme.

Therefore, when weighing in milligrammes or even smaller increments, we recommend neutralising the electrostatic charge with the KERN AC-Korona discharge ioniser. With feet  supplied with the ioniser, it can be positioned conveniently next to the balance or


you can manually direct it from all sides onto a particular item to be weighed.

- Discharge of ozone 0,05 ppm/h
- Total dimensions W×D×H 115×100×60 mm (Adjustable foot retracted), 115×110×80 mm (Adjustable foot folded out)
- Net weight approx. 0,31 kg
- Mains connection 100-240V, 50/60 Hz, AC power supply, DC 12V, 500 mA, output,

KERN YBI-01A, € 940,-



STANDARD

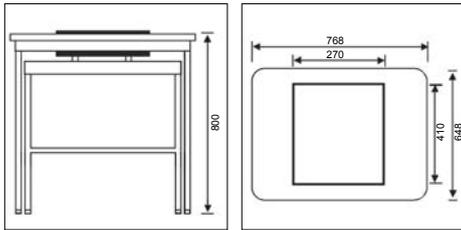

### KERN YPS-03

#### Weighing table

The KERN YPS-03 weighing table has been constructed to absorb vibrations and oscillations, which would otherwise distort the weighing result.

The YPS-03 weighing table consists of:

- a heavy, polished granite slab (34 kg) and is positioned on absorbing rubber components and is used as a surface on which to stand the analytical balance
- a work table, the work surface of which surrounds the slab and offers many storage options. The sturdy powder-coated steel frame has four height-adjustable feet, which can be used to accurately level the weighing table if the floor is at all uneven
- You can work in an ergonomic way at the weighing table whether you are in a standing or seated position. The inlet on the front of the table offers enough space for you to sit down and operate the scale without touching the weighing table.

- All surfaces are easy and hygienic to clean
- Suitable for all KERN analytical balances with total dimensions  $\leq W \times D$  270x410 mm
- Total dimensions  $W \times D \times H$  768x648x800 mm (Height adjustable)
- Dimensions granite slab,  $W \times D \times H$  270x410x115 mm
- Net weight approx. 62 kg

Ready for shipping in 2 working days. Dispatch complete on pallet. Please ask for dimensions, gross weight, shipping costs,

KERN YPS-03, € 990,-

STANDARD



### KERN YRO-01 / YRO-02 / YRO-03

#### Roller conveyor

Through the **smooth-running KERN roller conveyor attachments**, KERN YRO, you can convert your platform scale into a **robust measuring system** for rapid and flexible weight determination in conveyor applications

Especially **suitable for use in production and dispatch lines** where time means money. The goods or packages can either be weighed as they pass over the balance or, at fixed stations, heavy goods can easily be pushed onto the scale thanks to the roller conveyor and moved onto the connected roller conveyor

- **1** Simply connect the roller conveyor attachment to a platform (e.g. KERN IFB, IFG, IFS, IXS, KFP, KXP, SXS) – done!
- **Robust aluminium profile frame.** The modular design means that you can **easily disassemble it for cleaning** or to replace individual components
- **Smooth-running, hot-dip galvanised steel rollers with ball bearings**
- **Conductive rollers** (suitable for use in hazardous areas)
- Suitable for use in **dry environments**

- Roller distance approx. 30 mm
- Direction of movement is lengthways
- Total dimensions:  $W \times D \times H$   
YRO-01: 405x305x130 mm, suitable for platforms with weighing plate sizes  $W \times D$  400x300 mm  
YRO-02: 505x405x130 mm, suitable for platforms with weighing plate sizes  $W \times D$  500x400 mm  
YRO-03: 655x505x130 mm, suitable for platforms with weighing plate sizes  $W \times D$  650x500 mm
- Total net weight approx. YRO-01: 6 kg, YRO-02: 8 kg, YRO-03: 12 kg
- Scope of delivery: 1 roller conveyor attachment (without scale)


KERN YRO-01, € 660,-

KERN YRO-02, € 680,-

KERN YRO-03, € 910,-

# Tradition and innovation for more than 170 years

An independent family business, KERN since already 7 generations is synonymous with quality and reliability in customer service.



**1844**

KERN is founded – precision balances are produced



**1863**

A proud Gottlieb Kern with his staff



**1880**

Pharmaceutical balance with Aesculap



**1923**

Inflation – KERN wages are paid with self printed currency



**1980**

The electronic balance ousts mechanical devices



**1994**

Accredited DKD laboratory (ISO 17025)



**2000**

New premises in Balingen



**2002**

Existing QM system certification in accordance with DIN EN ISO 9001:2000 standards



**2007**

Approval for the manufacture of medical products (DIN EN 13485 and 93/42/EEC)



**2008**

Authorisation for initial verification by the manufacturer (2009/23/EU)



**2009**

Approval for the manufacture and sale of height rods (DIN EN 13485 and 93/42/EEC)



**2012**

Verification point for non-automatic balances and test weights.

New customer portal [www.kern-sohn.com](http://www.kern-sohn.com) goes live



**2014**

Expansion of the product range to include optical instruments (microscopes and refractometers)



**2015**

Inauguration of Ziegelei 2.0 with computer-controlled high-bay warehouse



**2017**

Come with KERN into the digital future: Expansion of the model ranges compatible with Industry 4.0, as well as the related services

**KERN & SOHN GmbH**  
**Balances, Test weights,**  
**DAkKS Calibration laboratory**  
Ziegelei 1  
72336 Balingen  
Germany

Tel. +49 [0] 7433 9933-0  
Fax +49 [0] 7433 9933-149

[info@kern-sohn.com](mailto:info@kern-sohn.com)  
[www.kern-sohn.com](http://www.kern-sohn.com)

