


# KERN FOB30K10LM

Edelstahlwaage mit erhöhtem Feuchteschutz und Eichzulassung [M]

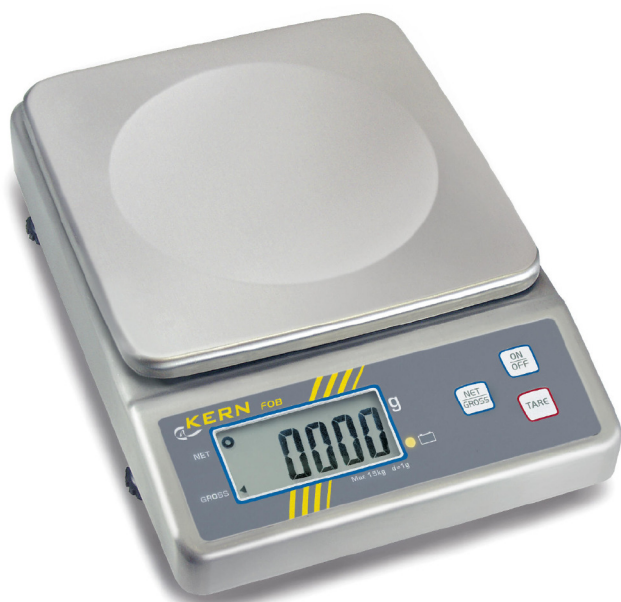

## Power supply

Charging time:	14 h
Operating time (Backlight off):	30 h
Rechargeable battery:	Rchrg. battery optional

## Service

DAkkS Certificate:	963-128
Verification:	965-228

## Category

Category:	Balances
Product Group:	Bench scale

## Packaging & shipping

Delivery:	24 h
Dimensions packaging (WxDxH):	430 x 280 x 150 mm
Gross weight:	3,800 kg
Net weight:	3,300 kg
Shipping method:	Parcel service

## Construction

Casing material:	stainless steel
Dimensions housing (WÄDÄH):	220 x 305 x 80 mm
Level indicator:	yes
Material weighing plate:	stainless steel
Revolving screw feet:	yes
Weighing surface (WxD):	215 x 215 mm

## Measuring system

Adjustment options:	External calibration
Linearity:	20 g
Readout [d]:	10 g
Recommended adjusting weight:	20000 g (M3)
Reproducibility:	10 g
Resolution:	3000
Stabilisation time:	2 s
Warm up time:	10 min
Weighing range [Max]:	30 kg
Weighing system:	Strain gauge
Weighing units:	kg

## Display

Display digit height:	2,500 cm
-----------------------	----------

## Technical data about verification

Minimum load [Min]:	200 g
Periodic Verification Italy:	969-112
Verification approval conforming to 90/384/EEC:	yes
Verification by KERN possible:	yes
Verification class:	III
Verification value [e]:	10 g

## Environmental conditions

Maximum humidity:	95 %
Maximum operating temperature:	40 °C
Minimum ambient temperature:	-10 °C
Minimum humidity:	25 %